


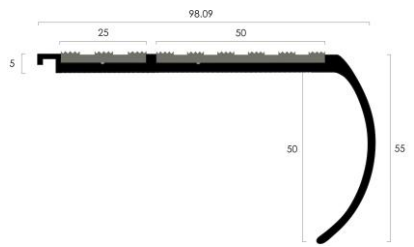

PRODUCT TECHNICAL DATA SHEET

Issued: May 2021

Catalogue Reference:	AN98 BA															
Uniclass2015:	Pr_35_90_31_74 RIGID STAIR NOSINGS															
General Description:	<p>ALUMINIUM STAIR NOSING WITH SLIP RESISTANT PVC INFILL Double Channel/Round Front. Supplied with Castellated PVC Infill.</p> <p>Infill colour options: Black, White, Light Grey, Flint, Granite, Rustic, Fawn, Ivory, Spruce, Jade, Regency, Mid Blue, Nimbus, Peat, Yellow, Poppy, Claret, Porth Stone, Polar Grey.</p> 															
	<table border="1"> <tr> <td>Castellated PVC Infill SRVs: PTV Dry - 85 PTV Wet - 76</td> </tr> </table>		Castellated PVC Infill SRVs: PTV Dry - 85 PTV Wet - 76													
Castellated PVC Infill SRVs: PTV Dry - 85 PTV Wet - 76																
Specifications:	<table border="1"> <tr> <td>Materials</td> <td>Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound</td> </tr> <tr> <td>Tread Dimension</td> <td>98.09mm</td> </tr> <tr> <td>Nosing Dimension</td> <td>55mm</td> </tr> <tr> <td>Gauge</td> <td>5mm</td> </tr> <tr> <td>Lengths available</td> <td>Cut to customer sizes up to 2700mm</td> </tr> <tr> <td>Finishes available</td> <td>Black Anodised.</td> </tr> <tr> <td>Drilling</td> <td>Can be supplied pre-drilled and countersunk in the channels for concealed fixing and on-site retro fitting of the infill, or through the infill with smooth pips supplied to cover the screw heads. Drilled for size 8 screws. Fixings not supplied.</td> </tr> </table>		Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound	Tread Dimension	98.09mm	Nosing Dimension	55mm	Gauge	5mm	Lengths available	Cut to customer sizes up to 2700mm	Finishes available	Black Anodised.	Drilling	Can be supplied pre-drilled and countersunk in the channels for concealed fixing and on-site retro fitting of the infill, or through the infill with smooth pips supplied to cover the screw heads. Drilled for size 8 screws. Fixings not supplied.
Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound															
Tread Dimension	98.09mm															
Nosing Dimension	55mm															
Gauge	5mm															
Lengths available	Cut to customer sizes up to 2700mm															
Finishes available	Black Anodised.															
Drilling	Can be supplied pre-drilled and countersunk in the channels for concealed fixing and on-site retro fitting of the infill, or through the infill with smooth pips supplied to cover the screw heads. Drilled for size 8 screws. Fixings not supplied.															
Application:	<p>For abutting to carpet and carpet tiles to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Compatible with profiles ANE Nap Detail, ANRE25 Ramp Detail and ANEXT extension tread. Installation guide available.</p>															
Suitability:	<p>Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.</p>															

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com