


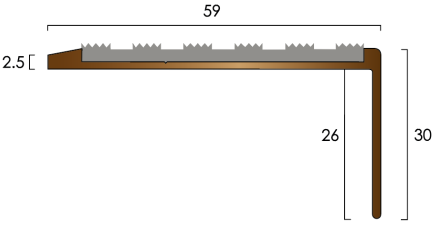


Part of the COBA Group

PRODUCT TECHNICAL DATA SHEET

Revised: February 2023

Catalogue Reference:	AN59 SL DC	
Uniclass2015:	Pr_35_90_31_74 RIGID STAIR NOSINGS	
General Description:	<p>DESIGNER COLLECTION SLIMLINE ALUMINIUM STAIR NOSING WITH SLIP RESISTANT PVC INFILL Single Channel/Square Front. Supplied with Castellated PVC Infill.</p> <p>Infill colour options: Black, White, Light Grey, Flint, Granite, Rustic, Fawn, Ivory, Spruce, Jade, Regency, Mid Blue, Nimbus, Peat, Yellow, Poppy, Claret, Porth Stone, Polar Grey.</p>  <p>Castellated Infill SRVs: PTV Dry - 85 PTV Wet - 76</p>	
Specifications:	Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound
	Tread Dimension	59mm
	Nosing Dimension	30mm
	Gauge	2.5mm
	Lengths available	Cut to customer sizes up to 2750mm
	Finishes available	Bronze, Light Bronze DESIGNER  COLLECTION
	Drilling	Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the infill, or through the infill with smooth pips supplied to cover the screw heads. Drilled for size 6 screws. Fixings not supplied.
Application:	For abutting to LVT and Vinyl to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Installation guide available.	
Suitability:	Medium to heavy contract situations such as for use in hotels, pubs, cafes, clubs, commercial offices, shops, schools and public building, as well as for quality domestic installations.	
Additional Information:	Also available with AT149.5 Tread Insert for an all-aluminium installation and Smooth Textured PVC infill for interior installation.	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com