



Part of the COBA Group

## PRODUCT TECHNICAL DATA SHEET

Revised: February 2023

**Catalogue Reference:**

**AN59R SL DC**

**Uniclass2015:**

**Pr\_35\_90\_31\_74 RIGID STAIR NOSINGS**

**General Description:**


**DESIGNER COLLECTION SLIMLINE ALUMINIUM STAIR NOSING WITH SLIP RESISTANT TREAD INSERT**

**Single Channel/Raked Front. Supplied with ATI49.5 Tread Insert.**

Tread Insert Finishes:  
Bronze, Light Bronze

Finishes can be supplied to match or to contrast with the base profile, as preferred.

**DESIGNER  
COLLECTION**

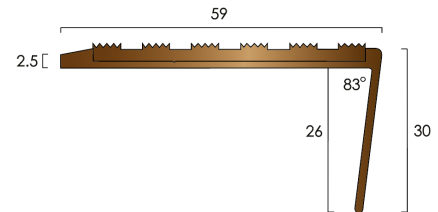

Castellated Infill SRVs: PTV Dry - 85 PTV Wet - 76

**Specifications:**

|                    |  |
|--------------------|--|
| Material           | Aluminium Alloy 6063 T6  |
| Tread Dimension    | 59mm   |
| Nosing Dimension   | 30mm   |
| Gauge              | 2.5mm  |
| Lengths available  | Cut to customer sizes up to 2500mm   |
| Finishes available | Bronze, Light Bronze   |
| Drilling           | Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the tread insert to cover the screw heads.<br><br>Drilled for size 6 screws.<br>Fixings not supplied. |

**Application:**

For abutting to LVT and Vinyl to finish the nose edge of stairs.  
Can be rebated to sit flush in wooden steps.  
Installation guide available.

**Suitability:**

Medium to heavy contract situations such as for use in hotels, pubs, cafes, clubs, commercial offices, shops, schools and public building, as well as for quality domestic installations.

**Additional Information:**

Also available with Castellated/Smooth Textured PVC Infill for interior applications.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**