



PRODUCT TECHNICAL DATA SHEET

Issued: October 2021

Catalogue Reference:

AN59R SL BA

Uniclass2015:


Pr_35_90_31_74 RIGID STAIR NOSINGS

General Description:

SLIMLINE ALUMINIUM STAIR NOSING WITH SLIP RESISTANT TREAD INSERT
Single Channel/Raked Front. Supplied with ATI49.5 Tread Insert.

Tread Insert Finishes & LRV's:

Mill Aluminium	Avg. LRV 71.65
Polished Aluminium	Avg. LRV 75.55
Satin Aluminium	Avg. LRV 65.40
Black Anodised	Avg. LRV 4.80

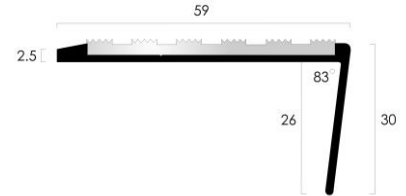

Finishes can be supplied to match or to contrast with the base profile, as preferred.

Castellated Aluminium ATI 49.5 Insert SRVs: PTV Dry - 82 PTV Wet - 54

Specifications:

Material	Aluminium Alloy 6063 T6
Tread Dimension	59mm
Nosing Dimension	30mm
Gauge	2.5mm
Lengths available	Cut to customer sizes up to 2700mm
Finish & LRV	Black Anodised Avg. LRV 4.80
Drilling	Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the tread insert to cover the screw heads. Drilled for size 6 screws. Fixings not supplied.

Application:

For abutting to LVT and Vinyl to finish the nose edge of stairs.
Can be rebated to sit flush in wooden steps.
Installation guide available.

Suitability:

For stair with low to medium traffic volumes. Heavy foot traffic and impact damage can wear through the finish to reveal the natural aluminium colour beneath.

Additional Information:

Also available with Olympic Grip carborundum infill for exterior/wet applications and Castellated/Smooth Textured PVC Infill for interior applications.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com