



PRODUCT TECHNICAL DATA SHEET

Revised: Oct 2021

Catalogue Reference: AN15R


Uniclass2015: Pr_35_90_31_74 RIGID STAIR NOSINGS

General Description:

ALUMINIUM STAIR NOSING WITH SLIP RESISTANT PVC INFILL
Single Channel/Raked Front. Supplied with Smooth Textured PVC Infill.

Tread Insert Finishes & LRV's:

Black	LRV 4.47
Light Grey	LRV 12.74
Porth Stone	LRV 53.11
Polar Grey	LRV 42.73

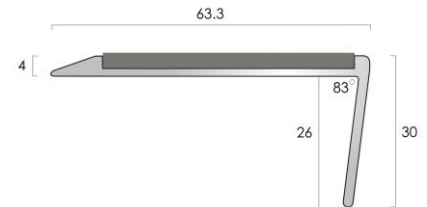

Smooth Textured Infill SRVs: PTV Dry - 65 PTV Wet - 56

Specifications:

Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound
Tread Dimension	63.5mm
Nosing Dimension	30mm
Gauge	4mm ramping down to 0.5mm
Lengths available	Cut to customer sizes up to 2500mm
Finishes & LRV's	Mill Aluminium Avg. LRV 71.65 Polished Aluminium Avg. LRV 75.55 Satin Aluminium Avg. LRV 65.40
Drilling	Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the infill, or through the infill with smooth pips supplied to cover the screw heads. Drilled for size 8 screws. Fixings not supplied.

Application:

To finish the nose edge of stone and timber stairs and stairs fitted with ceramics or hard flooring, e.g. laminates, LVT, vinyl, lino.
Installation guide available.

Suitability:

Very heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.

Additional Information:

Also available with ATI49.5 tread insert for an all-aluminium installation and Olympic Grip carborundum infill for exterior/wet applications.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com