



**PRODUCT TECHNICAL DATA SHEET**

Revised: October 2021

**Catalogue Reference:**

**AN4 BA**


**Uniclass2015:**

**Pr\_35\_90\_31\_74 RIGID STAIR NOSINGS**

**General Description:**

**ALUMINIUM STAIR NOSING WITH CASTELLATED TREAD**

Square Front

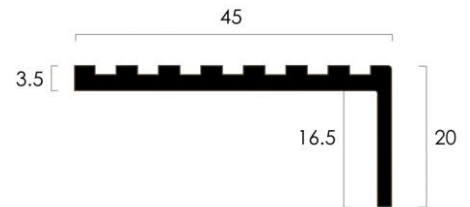

SRVs: PTV Dry - 82 PTV Wet - 54

**Specifications:**

Material	Aluminium Alloy 6063 T6
Tread Dimension	45mm
Nosing Dimension	20mm
Gauge	3.5mm
Lengths available	Cut to customer sizes up to 3200mm
Finishes available & LRV's	Black Anodised Avg. LRV 4.80
Drilling	Can be supplied pre-drilled and countersunk for flush fit screws.  Drilled for size 8 screws. Fixings not supplied.

**Application:**

For finishing the nose edge of stairs fitted with LVT, vinyl, lino.  
Can be rebated into wooden steps.  
Installation guide available.

**Suitability:**

For stairs with low to medium traffic volumes. Heavy foot traffic and impact damage can wear through the finish to reveal to natural aluminium colour beneath.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**