


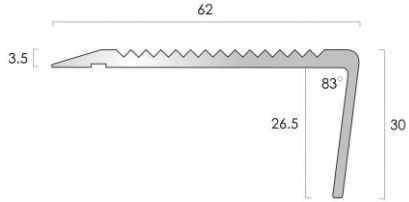

Catalogue Reference:	AN1SLR-R	
Uniclass2015:	Pr_35_90_31_74 RIGID STAIR NOSINGS	
General Description:	ALUMINIUM STAIR NOSING WITH RAMPED BACK AND RIBBED TREAD Raked Front <div style="text-align: right; margin-top: 20px;">  </div> <div style="text-align: right; margin-top: 10px; border: 1px solid black; padding: 2px;"> SRVs: PTV Dry - 73 PTV Wet - 45 </div>	
Specifications:	Material	Aluminium Alloy 6063 T6
	Tread Dimension	62mm
	Nosing Dimension	30mm
	Gauge	3.5mm, ramped down to 0.5mm
	Lengths available	Cut to customer sizes up to 2500mm
	Finishes available & LRV's	Mill Aluminium Avg. LRV 71.65 Polished Aluminium Avg. LRV 75.55 Satin Aluminium Avg. LRV 65.40
	Drilling	Can be supplied pre-drilled and countersunk for flush fit screws. Drilled for size 8 screws. Fixings not supplied.
Application:	For finishing the nose edge of stone and timber stairs and stairs fitted with ceramics or hard flooring, e.g. laminates, LVT, vinyl, lino. Installation guide available.	
Suitability:	Medium to heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com