



**PRODUCT TECHNICAL DATA SHEET**

Revised: Oct 2021

**Catalogue Reference:**


**BN1SLR15**

**Uniclass2015:**

**Pr\_35\_90\_31\_74 RIGID STAIR NOSINGS**

**General Description:**

**BRASS STAIR NOSING WITH RIBBED TREAD AND RAMPED BACK EDGE**

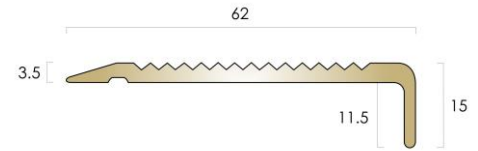

SRVs: PTV Dry - 73 PTV Wet - 45

**Specifications:**

Material	Solid Brass Grade H/H CZ108 BS EN 12164:2016
Tread Dimension	62mm
Nosing Dimension	15mm
Gauge	3.5mm ramping down to 0.5mm
Lengths available	Cut to customer sizes up to 3200mm
Finishes available & Associated Light Reflective Values or LRV's	Polished Brass Avg. LRV 71.45 Satin Brass Avg. LRV 59.55 Antique Brass Avg. LRV 29.55 Antique Bronze Avg. LRV 9.15  Antique Brass and Antique Bronze finishes are a chemically applied process and are hand finished with a variance from batch to batch. They are not foot-traffic resistant and are designed to create an aged, unpolished effect.
Drilling	Can be supplied pre-drilled and countersunk for flush fit screws or undrilled for adhesive fixing. C.A.T. recommends Stycco Flex rapid curing adhesive by F Ball & Co Ltd, subject to following their instructions for use. Drilled for size 8 screws. Fixings not supplied.

**Application:**

To finish the nose edge of stone and timber stairs and stairs fitted with ceramics or hard flooring, e.g. laminates, LVT, vinyl, lino.

**Suitability:**

Heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories

www.thecatweb.com