



# PRODUCT TECHNICAL DATA SHEET

Revised: October 2021

**Catalogue Reference:**

**AN81 BA**

**Uniclass2015:**


**Pr\_35\_90\_31\_74 RIGID STAIR NOSINGS**

**General Description:**

**ALUMINIUM STAIR NOSING WITH SLIP RESISTANT TREAD INSERT**  
**Single Channel/Round Front. Supplied with ATI49.5 Tread Insert.**

Tread Insert Finishes & LRV's:

- Mill Aluminium Avg. LRV 71.65
- Polished Aluminium Avg. LRV 75.55
- Satin Aluminium Avg. LRV 65.40
- Black Anodised Avg. LRV 4.80

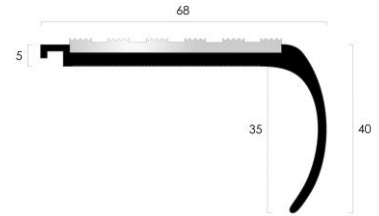

Finishes can be supplied to match or to contrast with the base profile, as preferred.

Castellated Infill SRVs: PTV Dry - 82 PTV Wet - 54

**Specifications:**

Material	Aluminium Alloy 6063 T6
Tread Dimension	68mm
Nosing Dimension	40mm
Gauge	5mm
Lengths available	Cut to customer sizes up to 2700mm
Finish & LRV	Black Anodised Avg. LRV 4.80
Drilling	Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the tread insert to cover the screw heads.  Drilled for size 8 screws. Fixings not supplied.

**Application:**

For abutting to carpet and carpet tiles to finish the nose edge of stairs.  
Can be rebated to sit flush in wooden steps.  
Installation guide available.

**Suitability:**

For stairs with low to medium traffic volumes. Heavy foot traffic and impact damage can wear through the finish to reveal the natural aluminium colour beneath.

**Additional Information:**

Also available with Olympic Grip carborundum infill for exterior/wet applications and Castellated/Smooth Textured PVC Infill for interior applications.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**