


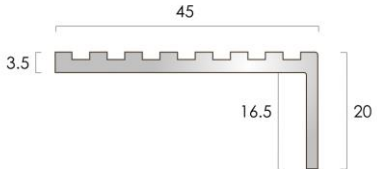

## PRODUCT TECHNICAL DATA SHEET

Revised: October 2021

<b>Catalogue Reference:</b>	<b>AN4</b>	
<b>Uniclass2015:</b>	<b>Pr_35_90_31_74 RIGID STAIR NOSINGS</b>	
<b>General Description:</b>	<b>ALUMINIUM STAIR NOSING WITH CASTELLATED TREAD</b> Square Front <div style="text-align: right; margin-top: 20px;">  </div> <div style="text-align: right; margin-top: 10px; border: 1px solid black; padding: 5px;">           SRVs: PTV Dry - 82 PTV Wet - 54         </div>	
<b>Specifications:</b>	Material	Aluminium Alloy 6063 T6
	Tread Dimension	45mm
	Nosing Dimension	20mm
	Gauge	3.5mm
	Lengths available	Cut to customer sizes up to 3200mm
	Finishes available & LRV's	<b>Mill Aluminium</b> Avg. LRV 71.65 <b>Polished Aluminium</b> Avg. LRV 75.55 <b>Satin Aluminium</b> Avg. LRV 65.40
	Drilling	Can be supplied pre-drilled and countersunk for flush fit screws.  Drilled for size 8 screws. Fixings not supplied.
<b>Application:</b>	For finishing the nose edge of stairs fitted with LVT, vinyl, lino. Can be rebated into wooden steps. Installation guide available.	
<b>Suitability:</b>	Medium to heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**