


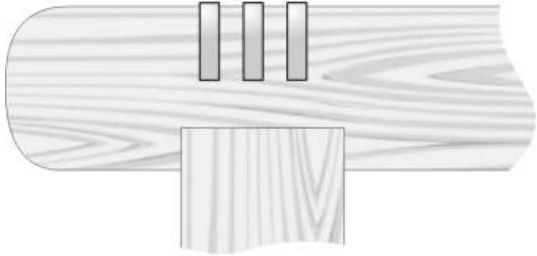

PRODUCT TECHNICAL DATA SHEET

Revised: October 2021

Catalogue Reference:	FPA 12x3	
Uniclass2015:	Pr_35_90_31_84 STAIR TRIMS	
General Description:	ALUMINIUM STAIR INSERT PLATES 	
Specifications:	Material	Aluminium Alloy 6063 T6
	Tread dimension	N/A
	Depth dimension	12mm
	Gauge	3mm
	Standard length	2500mm
	Finishes available & LRV's	Mill Aluminium Avg. LRV 71.65 Satin Aluminium Avg. LRV 65.40 Polished Aluminium Avg. LRV 75.55
	Fixing	Adhesive. We recommend Stycco Flex rapid curing flexible adhesive by F. Ball & Co Ltd. subject to following their instructions for use.
Application:	For rebating into stone and wooden steps or between ceramic tiles, to provide a visual aid and some slip resistance or for creating flooring features. Small variations in dimensions may occur and therefore rebating should be to suit the delivered product. Installation guide available.	
Suitability:	Medium to heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com