


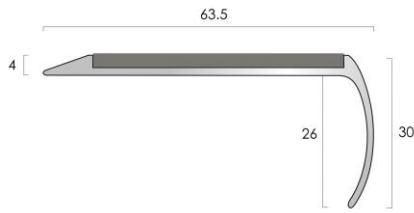

PRODUCT TECHNICAL DATA SHEET

Revised: Oct 2021

Catalogue Reference:	AN14									
Uniclass2015:	Pr_35_90_31_74 RIGID STAIR NOSINGS									
General Description:	<p>ALUMINIUM STAIR NOSING WITH SLIP RESISTANT PVC INFILL Single Channel/Round Front. Supplied with Smooth Textured PVC Infill.</p> <p>Tread Insert Finishes & LRV's:</p> <table border="0"> <tr> <td>Black</td> <td>LRV 4.47</td> </tr> <tr> <td>Light Grey</td> <td>LRV 12.74</td> </tr> <tr> <td>Porth Stone</td> <td>LRV 53.11</td> </tr> <tr> <td>Polar Grey</td> <td>LRV 42.73</td> </tr> </table> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> Smooth Textured Infill SRVs: PTV Dry - 65 PTV Wet - 56 </div> 		Black	LRV 4.47	Light Grey	LRV 12.74	Porth Stone	LRV 53.11	Polar Grey	LRV 42.73
Black	LRV 4.47									
Light Grey	LRV 12.74									
Porth Stone	LRV 53.11									
Polar Grey	LRV 42.73									
Specifications:	Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound								
	Tread Dimension	63.5mm								
	Nosing Dimension	30mm								
	Gauge	4mm ramping down to 0.5mm								
	Lengths available	Cut to customer sizes up to 3200mm								
	Finishes & LRV's	Mill Aluminium Avg. LRV 71.65 Polished Aluminium Avg. LRV 75.55 Satin Aluminium Avg. LRV 65.40								
	Drilling	Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the infill, or through the infill with smooth pips supplied to cover the screw heads. Drilled for size 8 screws. Fixings not supplied.								
Application:	To finish the nose edge of stone and timber stairs and stairs fitted with ceramics or hard flooring, e.g. laminates, LVT, vinyl, lino. Installation guide available.									
Suitability:	Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.									
Additional Information:	Also available with ATI49.5 tread insert for an all-aluminium installation and Olympic Grip carborundum infill for exterior/wet applications.									

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com