



PRODUCT TECHNICAL DATA SHEET

Revised: Oct 2021

Catalogue Reference:


BN11

Uniclass2015:

Pr_35_90_31_74 RIGID STAIR NOSINGS

General Description:

BRASS STAIR NOSING WITH RIBBED TREAD

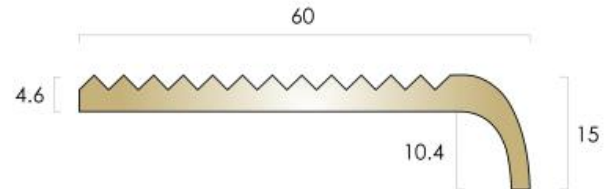

SRVs: PTV Dry - 73 PTV Wet - 45

Specifications:

Material	Solid Brass Grade H/H CZ108 BS EN 12164:2016
Tread Dimension	60mm
Nosing Dimension	15mm
Gauge	4.6mm
Lengths available	Cut to customer sizes up to 3200mm
Finishes available & Associated Light Reflective Values or LRV's	Polished Brass Avg. LRV 71.45 Satin Brass Avg. LRV 59.55 Antique Brass Avg. LRV 29.55 Antique Bronze Avg. LRV 9.15 Antique Brass and Antique Bronze finishes are a chemically applied process and are hand finished with a variance from batch to batch. They are not foot-traffic resistant and are designed to create an aged, unpolished effect.
Drilling	Can be supplied pre-drilled and countersunk for flush fit screws or undrilled for adhesive fixing. C.A.T. recommends Stycco Flex rapid curing adhesive by F Ball & Co Ltd, subject to following their instructions for use. Drilled for size 8 screws. Fixings not supplied.

Application:

For abutting to carpet and carpet tiles to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Installation guide available.

Suitability:

Heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com