


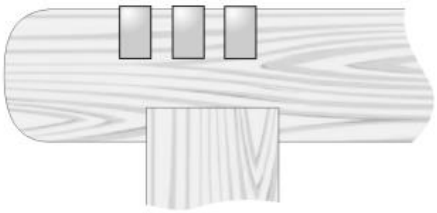

## PRODUCT TECHNICAL DATA SHEET

Revised: October 2021

<b>Catalogue Reference:</b>	FPA 10x6	
<b>Uniclass2015:</b>	Pr_35_90_31_84 STAIR TRIMS	
<b>General Description:</b>	<b>ALUMINIUM STAIR INSERT PLATES</b> 	
<b>Specifications:</b>	Material	Aluminium Alloy 6063 T6
	Tread dimension	N/A
	Depth dimension	10mm
	Gauge	6mm
	Standard length	2500mm
	Finishes available & LRV's	Mill Aluminium Avg. LRV 71.65 Satin Aluminium Avg. LRV 65.40 Polished Aluminium Avg. LRV 75.55
	Fixing	Adhesive. We recommend Stycco Flex rapid curing flexible adhesive by F. Ball & Co Ltd. subject to following their instructions for use.
<b>Application:</b>	For rebating into stone and wooden steps or between ceramic tiles, to provide a visual aid and some slip resistance or for creating flooring features. Small variations in dimensions may occur and therefore rebating should be to suit the delivered product. Installation guide available.	
<b>Suitability:</b>	Medium to heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**