



PRODUCT TECHNICAL DATA SHEET

Revised: Oct 2021

Catalogue Reference:

AN59R SL BA

Uniclass2015:


Pr_35_90_31_74 RIGID STAIR NOSINGS

General Description:

SLIMLINE ALUMINIUM STAIR NOSING WITH SLIP RESISTANT INFILL
Single Channel/Raked Front. Supplied with Olympic Grip Infill.

Infill Colour Options & LRV's:

Olympic Black LRV: 4.85

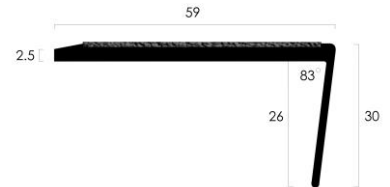

Olympic Grip Infill SRVs: PTV Dry - 92 PTV Wet - 86

Specifications:

Material	Aluminium Alloy 6063 T6
Tread Dimension	59mm
Nosing Dimension	30mm
Gauge	2.5mm
Lengths available	Cut to customer sizes up to 2700mm
Finishes & LRV's	Black Anodised Avg. LRV 4.80
Drilling	Can be supplied undrilled or pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the infill. Drilled for size 6 screws. Fixings not supplied.

Application:

For abutting to LVT and Vinyl to finish the nose edge of stairs.
 Can be rebated to sit flush in wooden steps.
 Installation guide available.

Suitability:

For stair with low to medium traffic volumes. Heavy foot traffic and impact damage can wear through the finish to reveal the natural aluminium colour beneath.

Additional Information:

Also available with AT149.5 Tread Insert for an all-aluminium installation and Castellated/Smooth Textured PVC infill for interior applications.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com