


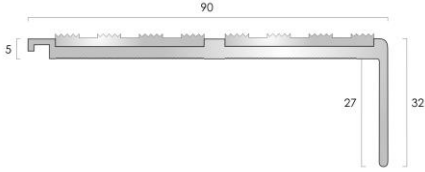

PRODUCT TECHNICAL DATA SHEET

Issued: October 2021

Catalogue Reference:	AN52							
Uniclass2015:	Pr_35_90_31_74 RIGID STAIR NOSINGS							
General Description:	<p>ALUMINIUM STAIR NOSING WITH SLIP RESISTANT TREAD INSERTS Double Channel/Square Front. Supplied with ATI37.25 Tread Inserts</p> <p>Tread Insert Finishes & LRV's:</p> <table border="0"> <tr> <td>Mill Aluminium</td> <td>Avg. LRV 71.65</td> </tr> <tr> <td>Polished Aluminium</td> <td>Avg. LRV 75.55</td> </tr> <tr> <td>Satin Aluminium</td> <td>Avg. LRV 65.40</td> </tr> </table> <p>Finishes can be supplied to match or to contrast with the base profile, as preferred.</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> Castellated Infill SRVs: PTV Dry - 82 PTV Wet - 54 </div> 		Mill Aluminium	Avg. LRV 71.65	Polished Aluminium	Avg. LRV 75.55	Satin Aluminium	Avg. LRV 65.40
Mill Aluminium	Avg. LRV 71.65							
Polished Aluminium	Avg. LRV 75.55							
Satin Aluminium	Avg. LRV 65.40							
Specifications:	Material	Aluminium Alloy 6063 T6						
	Tread Dimension	90mm						
	Nosing Dimension	32mm						
	Gauge	5mm						
	Lengths available	Cut to customer sizes up to 3200mm						
	Finishes available & LRV's	Mill Aluminium Avg. LRV 71.65 Polished Aluminium Avg. LRV 75.55 Satin Aluminium Avg. LRV 65.40						
	Drilling	<p>Can be supplied undrilled or pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the tread inserts to cover the screw heads.</p> <p>Drilled for size 8 screws. Fixings not supplied.</p>						
Application:	<p>For abutting to carpet and carpet tiles to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Compatible with profiles ANE Nap Detail, ANRE25 Ramp Detail and ANEXT extension tread. Installation guide available.</p>							
Suitability:	<p>Very heavy interior foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.</p>							
Additional Information:	<p>Also available with Olympic Grip carborundum infill for exterior/wet applications and Castellated/Smooth Textured PVC Infill for interior applications.</p>							

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com