


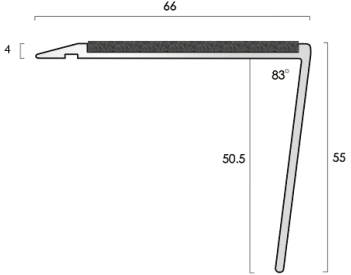

Part of the COBA Group

PRODUCT TECHNICAL DATA SHEET

Revised: June 2022

Catalogue Reference:	AN15/55R	
Uniclass2015:	Pr_35_90_31_74 RIGID STAIR NOSINGS	
General Description:	<p>ALUMINIUM STAIR NOSING WITH SLIP RESISTANT INFILL Single Channel/Square Front. Supplied with Olympic Grip Infill.</p> <p>Infill colour: Black</p> <div style="border: 1px solid black; padding: 2px; width: fit-content; margin: 10px auto;"> Olympic Grip Infill SRVs: PTV Dry - 92 PTV Wet - 86 </div> 	
Specifications:	Material	Aluminium Alloy 6063 T6
	Tread Dimension	66mm
	Nosing Dimension	55mm
	Gauge	4mm ramping down to 0.5mm
	Lengths available	Cut to customer sizes up to 2500mm
	Finishes available	Mill Aluminium, Satin Aluminium
	Drilling	<p>Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the infill.</p> <p>Drilled for size 6 screws. Fixings not supplied.</p>
Application:	To finish the nose edge of stone and timber stairs and stairs fitted with ceramics or hard flooring, e.g. laminates, LVT, vinyl, lino. Installation guide available.	
Suitability:	Heavy foot traffic and exterior/wet situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.	
Additional Information:	Also available with AT149.5 tread insert for an all-aluminium installation and Castellated/Smooth Textured PVC infill for interior applications.	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com