



Part of the COBA Group

PRODUCT TECHNICAL DATA SHEET

Issued: October 2023

Catalogue Reference:



FPA 6.5x3 BA FLOOR INLAY PLATE

Uniclass2015:

Pr_35_90_31_30 FLOOR DIVIDING STRIPS

General Description:

ALUMINIUM FLOOR INLAY PLATES

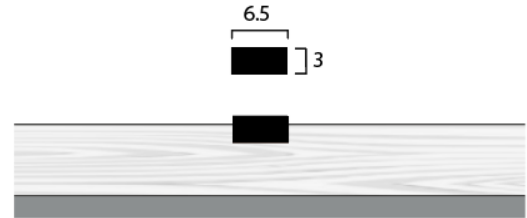

Specifications:

Material	Aluminium Alloy 6063 T6
Tread dimension	N/A
Width dimension	6.5mm
Gauge	3mm
Standard length	2.715mm
Finish	Black Anodised
Fixing	Adhesive. *We recommend Stycco Flex rapid curing flexible adhesive by F. Ball & Co Ltd. subject to following their instructions for use.

Application:

For inserting between floor finishes to create design features. Installation guide available.

Suitability:

Hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings. For installations with low to medium traffic volumes. Heavy foot traffic and impact damage can wear through the finish to reveal the natural aluminium colour beneath.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com