



Part of the COBA Group

PRODUCT TECHNICAL DATA SHEET

Revised: December 2022

Catalogue Reference:


BN1

Uniclass2015:

Pr_35_90_31_74 RIGID STAIR NOSINGS

General Description:

BRASS STAIR NOSING WITH RIBBED TREAD

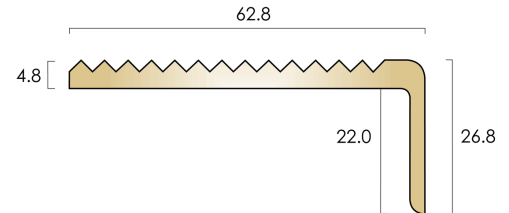

SRVs: PTV Dry - 73 PTV Wet - 45

Specifications:

Material	Solid Brass Grade H/H CZ108 BS EN 12164:2016
Tread Dimension	62.8mm
Nosing Dimension	26.8mm
Gauge	4.8mm
Lengths available	Cut to customer sizes up to 3200mm in Polished, 2700mm in other finishes
Finishes available	Polished Brass, Satin Brass, Antique Brass, Antique Bronze. Antique Brass and Antique Bronze finishes are a chemically applied process and are hand finished with a variance from batch to batch. They are not foot-traffic resistant and are designed to create an aged, unpolished effect.
Drilling	Can be supplied pre-drilled and countersunk for flush fit screws or undrilled for adhesive fixing. C.A.T. recommends Stycco Flex rapid curing adhesive by F Ball & Co Ltd, subject to following their instructions for use. Drilled for size 8 screws. Fixings not supplied.

Application:

For abutting to carpet and carpet tiles to finish the nose edge of stairs.
Can be rebated to sit flush in wooden steps. Installation guide available.

Suitability:

Heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com