



Part of the COBA Group

## PRODUCT TECHNICAL DATA SHEET

Revised: June 2022

**Catalogue Reference:** AN82

**Uniclass2015:** Pr\_35\_90\_31\_74 RIGID STAIR NOSINGS


**General Description:**

### ALUMINIUM STAIR NOSING WITH SLIP RESISTANT TREAD INSERTS

**Double Channel/Round Front. Supplied with ATI37.25 Tread Inserts**

Tread Insert finishes:  
Mill Aluminium, Polished Aluminium,  
Satin Aluminium.

Finishes can be supplied to match or to  
contrast with the base profile, as preferred.

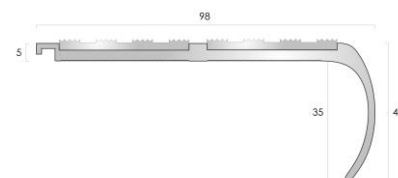

Castellated Infill SRVs: PTV Dry - 82 PTV Wet - 54

**Specifications:**

Material	Aluminium Alloy 6063 T6
Tread Dimension	98mm
Nosing Dimension	40mm
Gauge	5mm
Lengths available	Cut to customer sizes up to 3200mm
Finishes available	Mill Aluminium, Satin Aluminium, Polished Aluminium.
Drilling	Can be supplied undrilled or pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the tread inserts to cover the screw heads.  Drilled for size 8 screws. Fixings not supplied.

**Application:**

For abutting to carpet and carpet tiles to finish the nose edge of stairs.  
Can be rebated to sit flush in wooden steps.  
Compatible with profiles ANE Nap Detail, ANRE25 Ramp Detail and  
ANEXT extension tread.  
Installation guide available.

**Suitability:**

Very heavy interior foot traffic situations such as in hotels, pubs, clubs, cafes, shops,  
schools, commercial offices and apartment buildings.

**Additional Information:**

Also available with Olympic Grip carborundum infill for exterior/wet applications  
and Castellated/Smooth Textured PVC Infill for interior applications.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**