


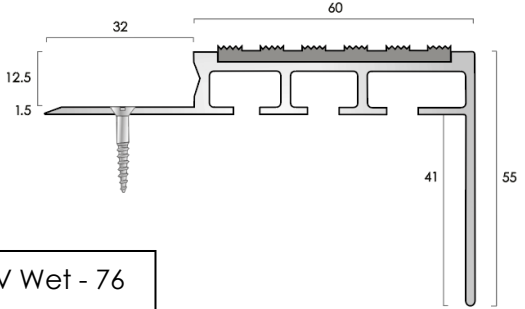

Part of the COBA Group

PRODUCT TECHNICAL DATA SHEET

Revised: June 2022

Catalogue Reference:	ANT60/55/12.5															
Uniclass2015:	Pr_35_90_31_74 RIGID STAIR NOSINGS															
General Description:	<p>ALUMINIUM STAIR NOSING WITH SLIP RESISTANT INFILL Single Channel/Square Front. Supplied with Castellated PVC Infill.</p> <p>Infill colour options: Black, White, Light Grey, Flint, Granite, Rustic, Fawn, Ivory, Spruce, Jade, Regency, Mid Blue, Nimbus, Peat, Yellow, Poppy, Claret, Porth Stone, Polar Grey.</p> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> Castellated Infill SRVs: PTV Dry - 85 PTV Wet - 76 </div>															
Specifications:	 <table border="1"> <tr> <td>Materials</td> <td>Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound</td> </tr> <tr> <td>Tread Dimension</td> <td>60mm</td> </tr> <tr> <td>Nosing Dimension</td> <td>55mm</td> </tr> <tr> <td>Gauge</td> <td>12.5mm</td> </tr> <tr> <td>Lengths available</td> <td>Cut to customer sizes up to 2750mm</td> </tr> <tr> <td>Finishes available</td> <td>Mill Aluminium, Satin Aluminium</td> </tr> <tr> <td>Drilling</td> <td>Can be supplied pre-drilled and countersunk in the rear tail plate. Fixings are concealed by the adjoining floor covering. Drilled for size 8 screws. Fixings not supplied.</td> </tr> </table>		Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound	Tread Dimension	60mm	Nosing Dimension	55mm	Gauge	12.5mm	Lengths available	Cut to customer sizes up to 2750mm	Finishes available	Mill Aluminium, Satin Aluminium	Drilling	Can be supplied pre-drilled and countersunk in the rear tail plate. Fixings are concealed by the adjoining floor covering. Drilled for size 8 screws. Fixings not supplied.
Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound															
Tread Dimension	60mm															
Nosing Dimension	55mm															
Gauge	12.5mm															
Lengths available	Cut to customer sizes up to 2750mm															
Finishes available	Mill Aluminium, Satin Aluminium															
Drilling	Can be supplied pre-drilled and countersunk in the rear tail plate. Fixings are concealed by the adjoining floor covering. Drilled for size 8 screws. Fixings not supplied.															
Application:	For use with thicker floor coverings such as ceramics, stone and timber to finish the nose edge of stairs. Installation guide available.															
Suitability:	Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.															
Additional Information:	Also available with ATI49.5 tread insert for an all-aluminium installation, and Olympic Grip carborundum infill for exterior/wet applications.															

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com