

**Catalogue Reference:**



**FPA 9x3 BA FLOOR INLAY PLATE**

**Uniclass2015:**

**Pr\_35\_90\_31\_30 FLOOR DIVIDING STRIPS**

**General Description:**

**ALUMINIUM FLOOR INLAY PLATES**

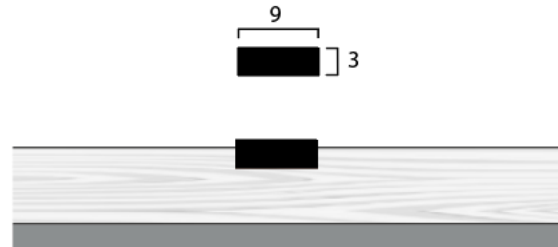

**Specifications:**

|                 |   |
|-----------------|---|
| Material        | Aluminium Alloy 6063 T6   |
| Tread dimension | N/A   |
| Width dimension | 9mm   |
| Gauge           | 3mm   |
| Standard length | 2.715mm   |
| Finish          | Black Anodised  |
| Fixing          | Adhesive.<br>*We recommend Stycco Flex rapid curing flexible adhesive by F. Ball & Co Ltd. subject to following their instructions for use. |

**Application:**

For inserting between floor finishes to create design features. Installation guide available.

**Suitability:**

Hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings. For installations with low to medium traffic volumes. Heavy foot traffic and impact damage can wear through the finish to reveal the natural aluminium colour beneath.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com