



Part of the COBA Group

## PRODUCT TECHNICAL DATA SHEET

Revised: June 2019

**Catalogue Reference:**


**BTI 52**

**Uniclass2015:**

**Pr\_35\_90\_31\_84 STAIR TRIMS**

**General Description:**

**BRASS RIBBED STAIR TREAD INSERT**

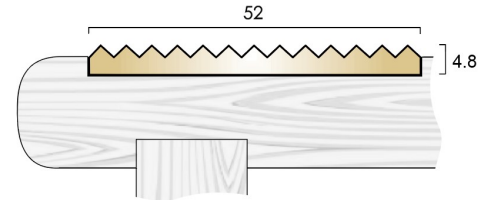

SRVs: PTV Dry - 73 PTV Wet - 45

**Specifications:**

Material	Solid Brass Grade H/H CZ108 BS EN 12164:2016
Tread Dimension	52mm
Nosing Dimension	n/a
Gauge	4.8mm
Lengths available	Cut to customer sizes up to 3200mm in Mill Brass, 2700mm in other available finishes
Finishes available	Mill Brass, Polished Brass, Satin Brass, Antique Brass, Antique Bronze. Antique Brass and Antique Bronze finishes are a chemically applied process and are hand finished with a variance from batch to batch. They are not foot-traffic resistant and are designed to create an aged, unpolished effect.
Fixing	Adhesive. *We recommend Stycco Flex rapid curing flexible adhesive by F. Ball & Co Ltd. subject to following their instructions for use. Can be supplied drilled on request.

**Application:**

For rebating into stone and wooden steps or between ceramic tiles, to provide a visual aid and some slip resistance.  
Can be used in combination with stair nosings of equivalent thickness to create extended step going cover.  
Installation guide available.

**Suitability:**

Heavy foot traffic situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**