


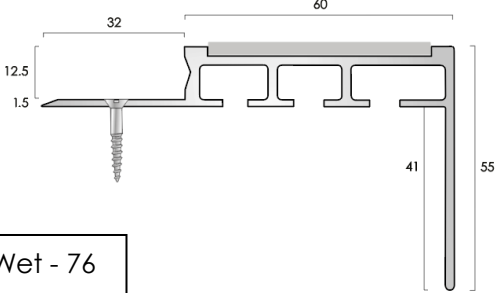

Part of the COBA Group

PRODUCT TECHNICAL DATA SHEET

Revised: June 2022

Catalogue Reference:	ANT60/55/12.5	
Uniclass2015:	Pr_35_90_31_74 RIGID STAIR NOSINGS	
General Description:	<p>ALUMINIUM STAIR NOSING WITH SLIP RESISTANT INFILL Single Channel/Square Front. Supplied with Smooth Textured PVC Infill.</p> <p>Infill colour options: Black, White, Light Grey, Polar Grey, Porth Stone</p> <div style="display: flex; justify-content: space-between; align-items: center;"> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> Castellated Infill SRVs: PTV Dry - 85 PTV Wet - 76 </div>  </div>	
Specifications:	Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound
	Tread Dimension	60mm
	Nosing Dimension	55mm
	Gauge	12.5mm
	Lengths available	Cut to customer sizes up to 2750mm
	Finishes available	Mill Aluminium, Satin Aluminium
	Drilling	Can be supplied pre-drilled and countersunk in the rear tail plate. Fixings are concealed by the adjoining floor covering. Drilled for size 8 screws. Fixings not supplied.
Application:	For use with thicker floor coverings such as ceramics, stone and timber to finish the nose edge of stairs. Installation guide available.	
Suitability:	Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.	
Additional Information:	Also available with AT149.5 tread insert for an all-aluminium installation, and Olympic Grip carborundum infill for exterior/wet applications.	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com