


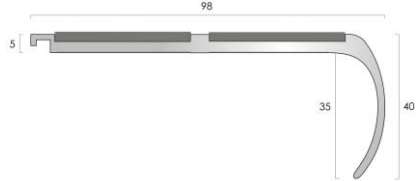

Part of the COBA Group

# PRODUCT TECHNICAL DATA SHEET

Revised: June 2022

<b>Catalogue Reference:</b>	<b>AN82</b>	
<b>Uniclass2015:</b>	<b>Pr_35_90_31_74 RIGID STAIR NOSINGS</b>	
<b>General Description:</b>	<p><b>ALUMINIUM STAIR NOSING WITH SLIP RESISTANT INFILL</b>  <b>Double Channel/Round Front. Supplied with Smooth Textured PVC Infill.</b></p> <p>Infill colour options:          Black, Light Grey,          Porth Stone, Polar Grey.</p> 	
	Smooth Textured Infill SRVs: PTV Dry - 65 PTV Wet - 56	
<b>Specifications:</b>	Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound
	Tread Dimension	98mm
	Nosing Dimension	40mm
	Gauge	5mm
	Lengths available	Cut to customer sizes up to 3200mm
	Finishes available	Mill Aluminium, Satin Aluminium, Polished Aluminium.
	Drilling	Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the infill, or through the infill with smooth pips supplied to cover the screw heads.  Drilled for size 8 screws. Fixings not supplied.
<b>Application:</b>	For abutting to carpet and carpet tiles to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Compatible with profiles ANE Nap Detail, ANRE25 Ramp Detail and ANEXT extension tread. Installation guide available.	
<b>Suitability:</b>	Medium to heavy foot traffic in interior situations such as in hotels, pubs, clubs, cafes, shops, schools, commercial offices and apartment buildings.	
<b>Additional Information:</b>	Also available with ATI37.25 tread insert for an all-aluminium installation, and Olympic Grip carborundum infill for exterior/wet applications.	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**