



Part of the COBA Group

# PRODUCT TECHNICAL DATA SHEET

Revised: February 2023

**Catalogue Reference:**

**AN59R SL DC**

**Uniclass2015:**


**Pr\_35\_90\_31\_74 RIGID STAIR NOSINGS**

**General Description:**

**DESIGNER COLLECTION SLIMLINE ALUMINIUM STAIR NOSING WITH SLIP RESISTANT PVC INFILL**

**Single Channel/Raked Front. Supplied with Smooth Textured PVC Infill.**

Infill colour options:  
Black, Light Grey,  
Porth Stone, Polar Grey.

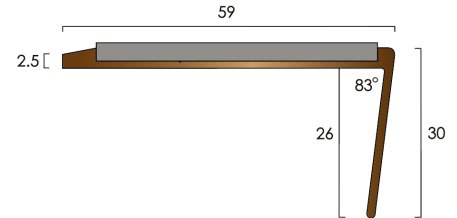

Smooth Textured Infill SRVs: PTV Dry - 65 PTV Wet - 56

**Specifications:**

Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound
Tread Dimension	59mm
Nosing Dimension	30mm
Gauge	2.5mm
Lengths available	Cut to customer sizes up to 2500mm
Finishes available	Bronze, Light Bronze <b>DESIGNER</b> HOME COLLECTION
Drilling	Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the infill, or through the infill with smooth pips supplied to cover the screw heads.  Drilled for size 6 screws. Fixings not supplied.
Application:	For abutting to LVT and Vinyl to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Installation guide available.
Suitability:	Medium to heavy contract situations such as for use in hotels, pubs, cafes, clubs, commercial offices, shops, schools and public building, as well as for quality domestic installations.
Additional Information:	Also available with AT149.5 Tread Insert for an all-aluminium installation and PVC Castellated infill for interior installation.

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**