


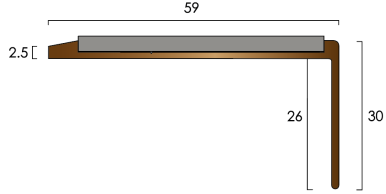


Part of the COBA Group

## PRODUCT TECHNICAL DATA SHEET

Revised: February 2023

<b>Catalogue Reference:</b>	<b>AN59 SL DC</b>	
<b>Uniclass2015:</b>	<b>Pr_35_90_31_74 RIGID STAIR NOSINGS</b>	
<b>General Description:</b>	<p><b>DESIGNER COLLECTION SLIMLINE ALUMINIUM STAIR NOSING WITH SLIP RESISTANT PVC INFILL</b>  <b>Single Channel/Square Front. Supplied with Smooth Textured PVC Infill.</b></p> <p>Infill colour options:            Black, Light Grey,            Porth Stone, Polar Grey.</p> 	
	Smooth Textured Infill SRVs: PTV Dry - 65 PTV Wet - 56	
<b>Specifications:</b>	Materials	Profile: Aluminium Alloy 6063 T6 Infill: PVC Compound
	Tread Dimension	59mm
	Nosing Dimension	30mm
	Gauge	2.5mm
	Lengths available	Cut to customer sizes up to 2750mm
	Finishes available	Bronze, Light Bronze <b>DESIGNER</b>  <b>COLLECTION</b>
	Drilling	Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the infill, or through the infill with smooth pips supplied to cover the screw heads.  Drilled for size 6 screws. Fixings not supplied.
<b>Application:</b>	For abutting to LVT and Vinyl to finish the nose edge of stairs. Can be rebated to sit flush in wooden steps. Installation guide available.	
<b>Suitability:</b>	Medium to heavy contract situations such as for use in hotels, pubs, cafes, clubs, commercial offices, shops, schools and public building, as well as for quality domestic installations.	
<b>Additional Information:</b>	Also available with AT149.5 Tread Insert for an all-aluminium installation and PVC Castellated infill for interior installation.	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**