


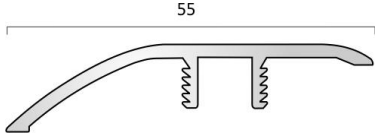

PRODUCT TECHNICAL DATA SHEET

Revised: June 2019

Catalogue Reference:	KK133 - KLIKS RAMP TOP ALUMINIUM	
Uniclass2015:	Pr_35_90_31_90 TWO PART FLOOR TRANSITION STRIPS	
General Description:	PROFILE FOR JOINING FLOOR COVERINGS OF DIFFERENT HEIGHTS.	
	<p>Serrated down leg to interlock with KB base profiles. Allows up to 12mm expansion.</p>	
Specifications:	Material	Aluminium Alloy 6063 T6
	Visible surface when installed	55mm
	Height adjustment	9.5mm to 23mm, depending on chosen base
	Compatible bases	KB1, KB2, KB3
	Lengths available	2715mm
	Finishes available	Satin Aluminium
	Standard supply	Undrilled.
	Application:	<p>Installed in combination with one of three compatible bases to protect the edges of the floor coverings. The chosen KB base is firmly affixed to the substrate floor then the top pressed down over it to engage interlock feature between the two profiles. Ideal for finishing timber, ceramic tiles, laminates and any other flooring that requires expansion.</p>
Suitability:	<p>Heavy contract situations such as for use in hotels, pubs, cafes, clubs, commercial offices, shops, schools and public building, as well as for quality domestic installations.</p>	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

Manufacturers Of The Finest Specialist Flooring Accessories
www.thecatweb.com