


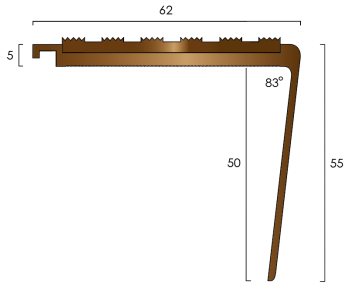

Part of the COBA Group

# PRODUCT TECHNICAL DATA SHEET

Revised: February 2023

<b>Catalogue Reference:</b>	<b>AN51/55R DC</b>	
<b>Uniclass2015:</b>	<b>Pr_35_90_31_74 RIGID STAIR NOSINGS</b>	
<b>General Description:</b>	<p><b>DESIGNER COLLECTION ALUMINIUM STAIR NOSING WITH SLIP RESISTANT TREAD INSERT</b>  <b>Single Channel/Raked Front. Supplied with AT149.5 Tread Insert.</b>  Tread Insert Finishes:  Bronze, Light Bronze</p> <p>Finishes can be supplied to match or to contrast with the base profile, as preferred.</p> <p><b>DESIGNER COLLECTION</b></p> <p>Castellated Infill SRVs: PTV Dry - 82 PTV Wet - 54</p>	
		
<b>Specifications:</b>	Material	Aluminium Alloy 6063 T6
	Tread Dimension	62mm
	Nosing Dimension	55mm
	Gauge	5mm
	Lengths available	Cut to customer sizes up to 2500mm
	Finishes available	Bronze, Light Bronze
	Drilling	<p>Can be supplied pre-drilled and countersunk in the channel for concealed fixing and on-site retro fitting of the tread insert to cover the screw heads.</p> <p>Drilled for size 8 screws.  Fixings not supplied.</p>
<b>Application:</b>	<p>For abutting to carpet and carpet tiles to finish the nose edge of stairs.  Can be rebated to sit flush in wooden steps.  Compatible with profiles ANE Nap Detail, ANRE25 Ramp Detail and ANEXT extension tread.  Installation guide available.</p>	
<b>Suitability:</b>	<p>Medium to heavy contract situations such as for use in hotels, pubs, cafes, clubs, commercial offices, shops, schools and public building, as well as for quality domestic installations.</p>	
<b>Additional Information:</b>	<p>Also available with Castellated/Smooth Textured PVC Infill for interior applications.</p>	

Post Consumer Recyclability: This product is 100% recyclable at suitable disposal centres.

C.A.T. LTD. Units 24A,B,C Park Avenue Estate, Luton Bedfordshire LU3 3BP. U.K.

T: +44 (0) 1582 561500 F: +44 (0) 1582 561900

email: sales@cat-accs.com

website: www.thecatweb.com

**Manufacturers Of The Finest Specialist Flooring Accessories**  
**www.thecatweb.com**